

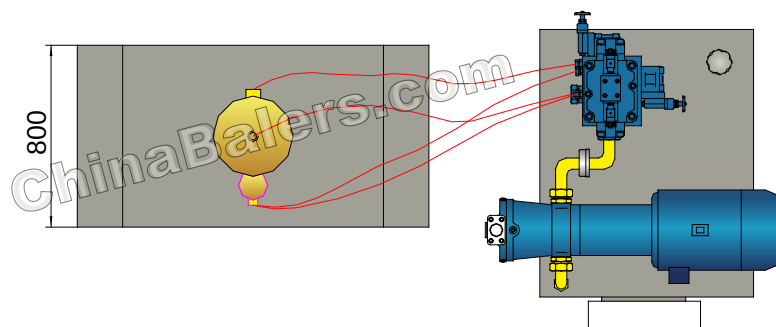
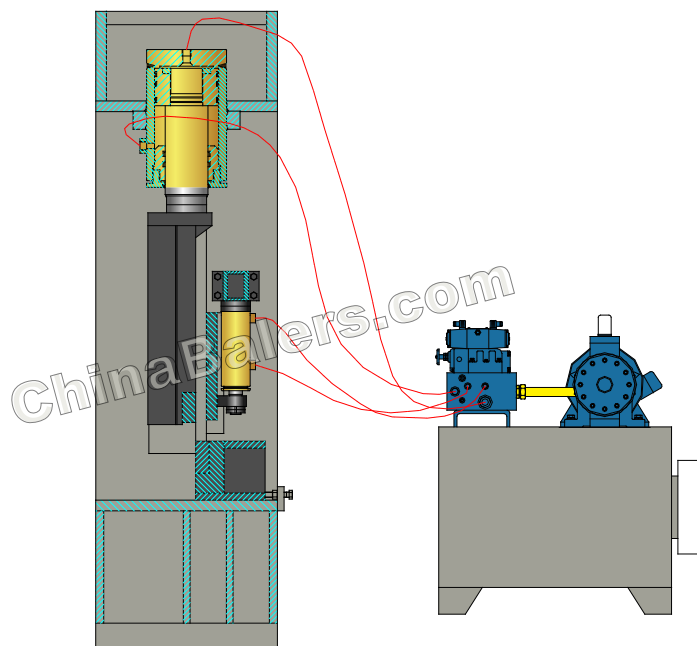


ChinaBalers


Q15 Square Sheet Shear

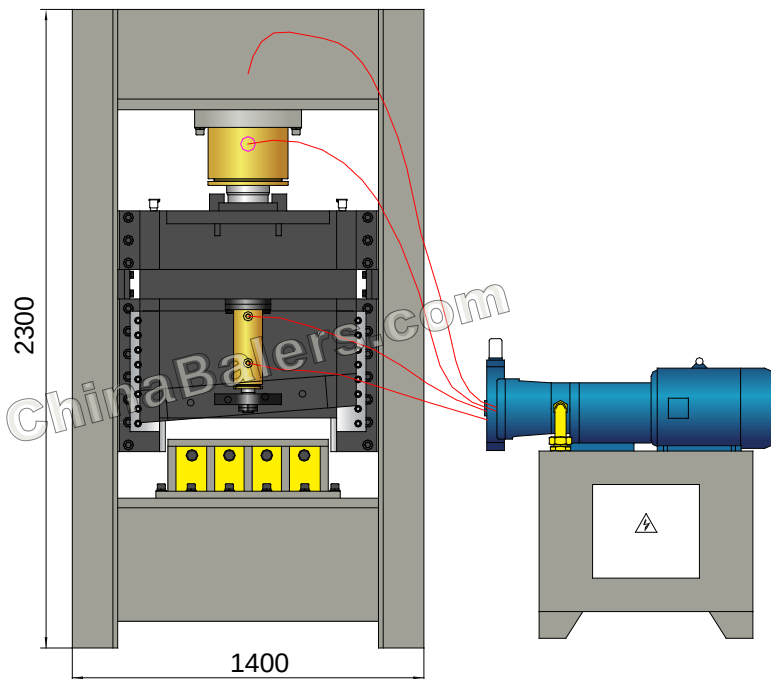

Q15A-1200



Q15A-1200



Hydraulic Shear (Square Shear)

Model: Q15A-1200

Power System (Motor)

Type:	Y160L-4
Rated Power:	15 kW
Rated Speed:	1460 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Max. Shearing Force:	120 Ton
Max. Pressing Force:	12.5 Ton
Hydraulic System Pressure:	25 MPa
Cutting Speed:	4-7 times/min

Hydraulic System (Pump)

Type:	63YCY14-1B
Rated Displacement:	63 ml/r
Max Operating Pressure:	31.5 MPa

Optional Configuration

NOK (JAPAN) Seal Packings for Cylinders;
Cooler / Heater;
Magnetic Oil Filter;
Diesel / Diesel Generator for Power.

Operation System

Hydro-electrical Valves, Push Button Control.

General Description

Main Machine Size (L×W×H):	1400×800×2300 mm
Height of Working Table:	720 mm
Blade Length:	600 mm
Blade Angle:	4.5 Degree
Shear Opening:	70 mm
Max. Cutting Size (Steel Sheet):	18×500 mm
Shipping Weight:	Approx. 4.7 tons
Loading (Standard Containers):	1/3×20'GP





Hydraulic Oil Brand

Oil Tank Volume: 450 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

Q15A-1600

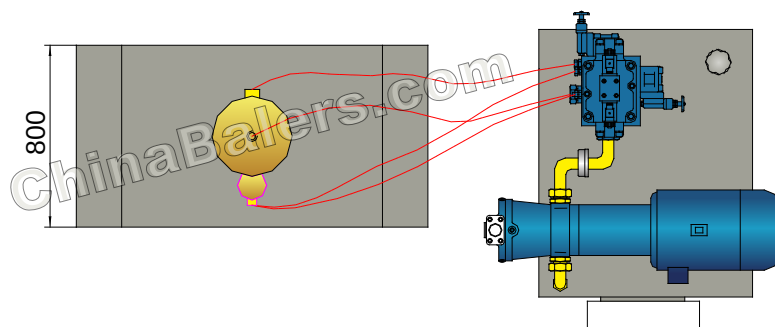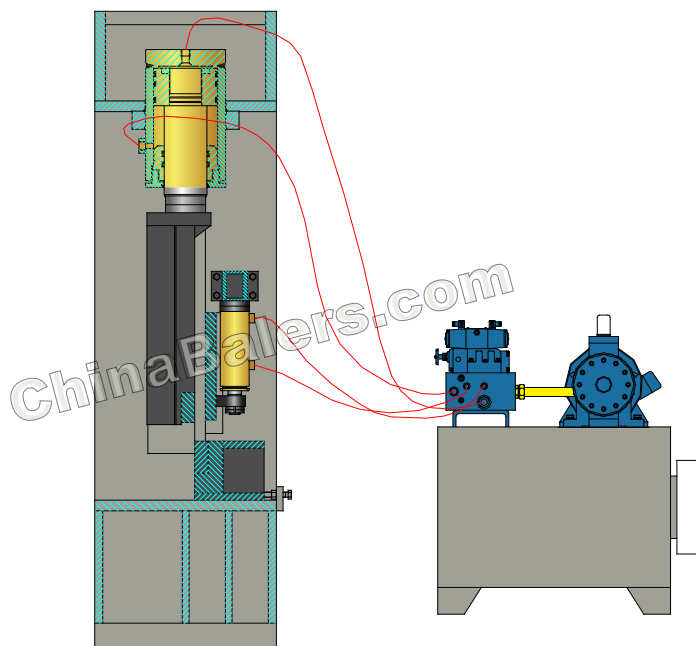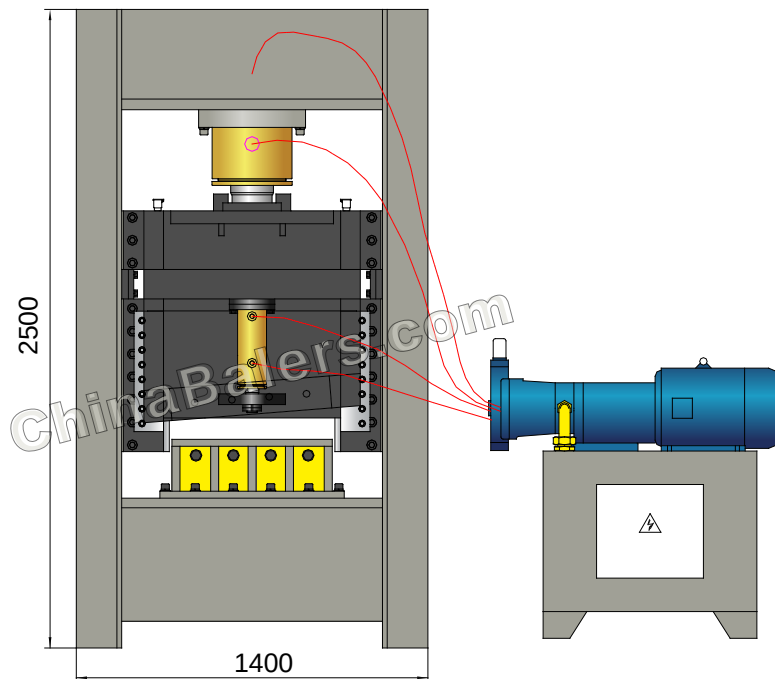

Q15A-1600



Hydraulic Shear (Square Shear)

Model: Q15A-1600

Power System (Motor)

Type:	Y180M-4
Rated Power:	18.5 kW
Rated Speed:	1470 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Max. Shearing Force:	160 Ton
Max. Pressing Force:	12.5 Ton
Hydraulic System Pressure:	25 MPa
Cutting Speed:	4-7 times/min

Hydraulic System (Pump)

Type:	80YCY14-1B
Rated Displacement:	80 ml/r
Max Operating Pressure:	31.5 MPa

Optional Configuration

NOK (JAPAN) Seal Packings for Cylinders;
Cooler / Heater;
Magnetic Oil Filter;
Diesel / Diesel Generator for Power.

Operation System

Hydro-electrical Valves, Push Button Control.

General Description

Main Machine Size (L×W×H):	1400×800×2500 mm
Height of Working Table:	780 mm
Blade Length:	600 mm
Blade Angle:	4.5 Degree
Shear Opening:	100 mm
Max. Cutting Size (Steel Sheet):	20×500 mm
Shipping Weight:	Approx. 5.1 tons
Loading (Standard Containers):	1/3×20'GP





Hydraulic Oil Brand

Oil Tank Volume: 600 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

Q15A-2000 I

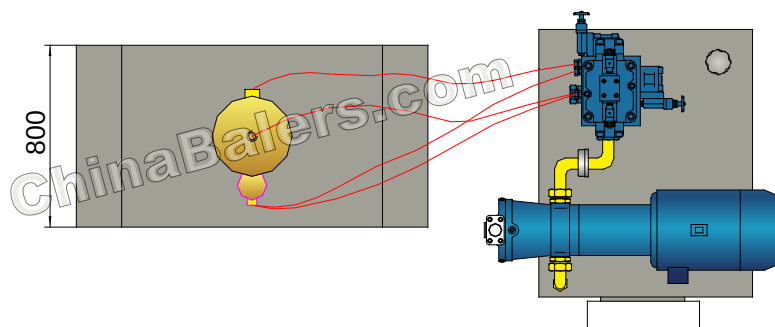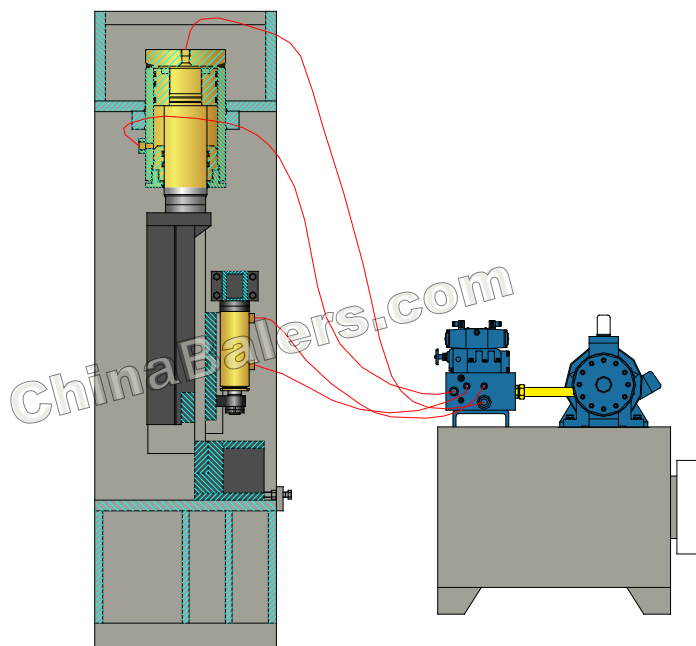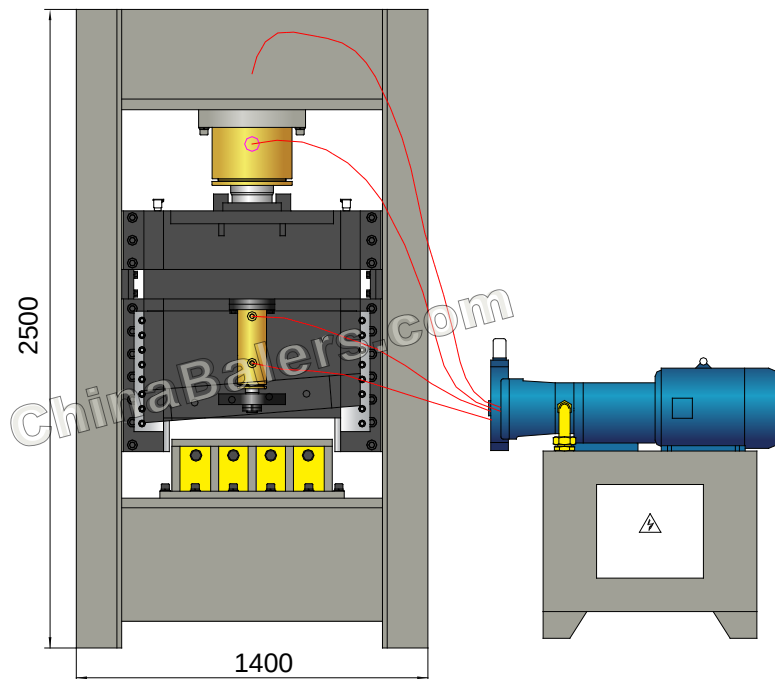

Q15A-2000 I



Hydraulic Shear (Square Shear)

Model: Q15A-2000 I

Power System (Motor)

Type:	Y200L2-6
Rated Power:	22 kW
Rated Speed:	970 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Max. Shearing Force:	200 Ton
Max. Pressing Force:	12.5 Ton
Hydraulic System Pressure:	25 MPa
Cutting Speed:	4-7 times/min

Hydraulic System (Pump)

Type:	160YCY14-1B
Rated Displacement:	160 ml/r
Max Operating Pressure:	31.5 MPa

Optional Configuration

NOK (JAPAN) Seal Packings for Cylinders;
Cooler / Heater;
Magnetic Oil Filter;
Diesel / Diesel Generator for Power.

Operation System

Hydro-electrical Valves, Push Button Control.

General Description

Main Machine Size (L×W×H):	1400×800×2500 mm
Height of Working Table:	780 mm
Blade Length:	600 mm
Blade Angle:	4.5 Degree
Shear Opening:	100 mm
Max. Cutting Size (Steel Sheet):	25×500 mm
Shipping Weight:	Approx. 5.5 tons
Loading (Standard Containers):	1/2×20'GP





Hydraulic Oil Brand

Oil Tank Volume: 1400 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

Q15A-2000 II

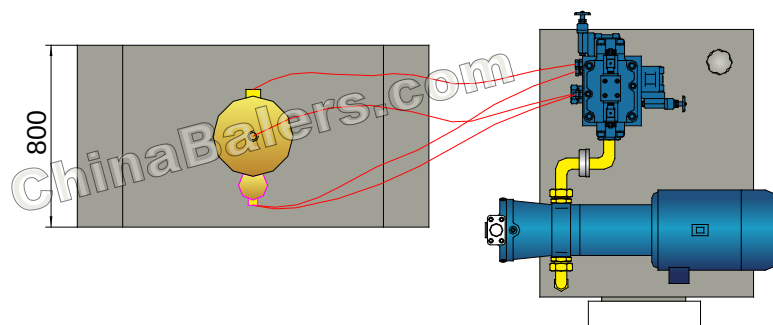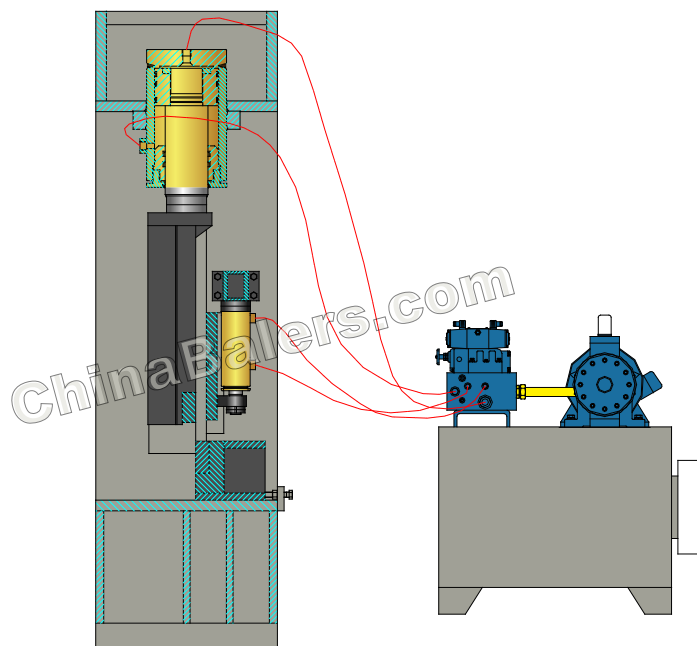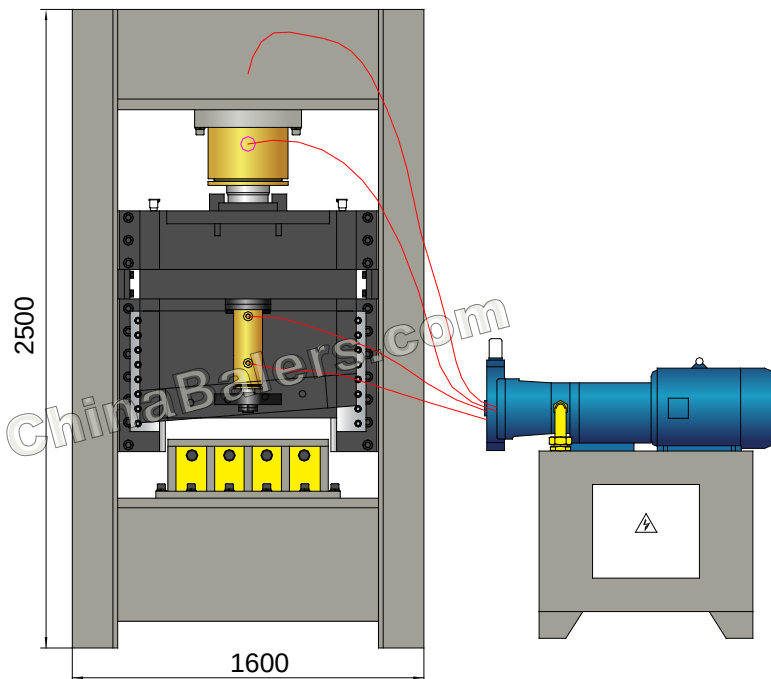

Q15A-2000 II



Hydraulic Shear (Square Shear)

Model: Q15A-2000 II

Power System (Motor)

Type:	Y200L2-6
Rated Power:	22 kW
Rated Speed:	970 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Max. Shearing Force:	200 Ton
Max. Pressing Force:	12.5 Ton
Hydraulic System Pressure:	25 MPa
Cutting Speed:	4-7 times/min

Hydraulic System (Pump)

Type:	160YCY14-1B
Rated Displacement:	160 ml/r
Max Operating Pressure:	31.5 MPa

Optional Configuration

NOK (JAPAN) Seal Packings for Cylinders;
Cooler / Heater;
Magnetic Oil Filter;
Diesel / Diesel Generator for Power.

Operation System

Hydro-electrical Valves, Push Button Control.

General Description

Main Machine Size (L×W×H):	1600×800×2500 mm
Height of Working Table:	780 mm
Blade Length:	800 mm
Blade Angle:	4.5 Degree
Shear Opening:	80 mm
Max. Cutting Size (Steel Sheet):	25×700 mm
Shipping Weight:	Approx. 6.1 tons
Loading (Standard Containers):	1/2×20'GP





Hydraulic Oil Brand

Oil Tank Volume: 1400 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

Q15A-2500 I

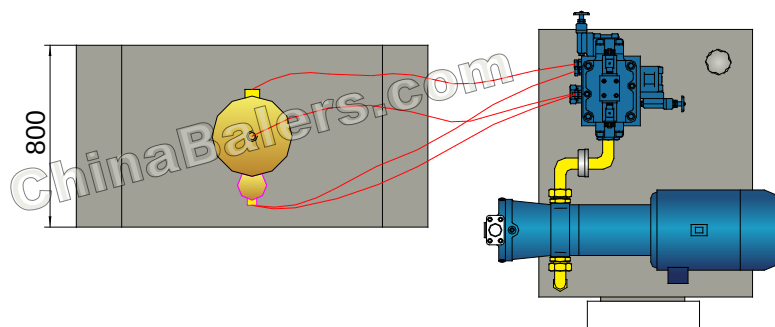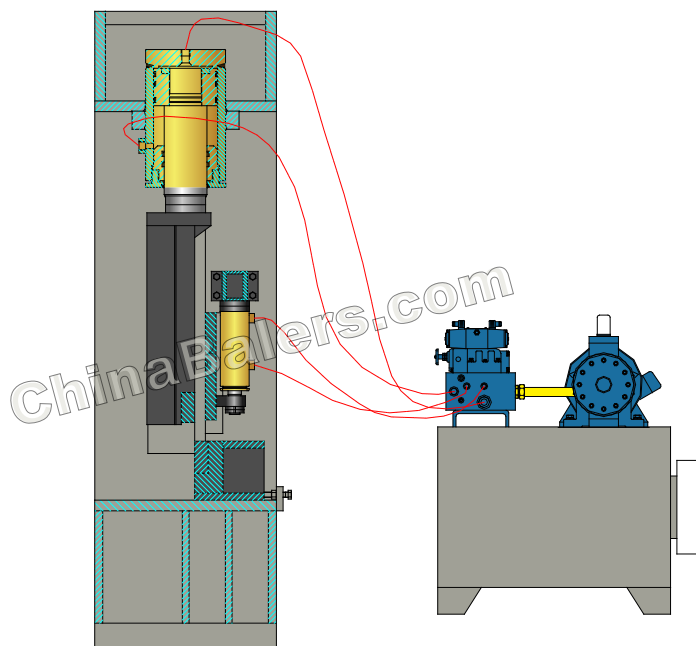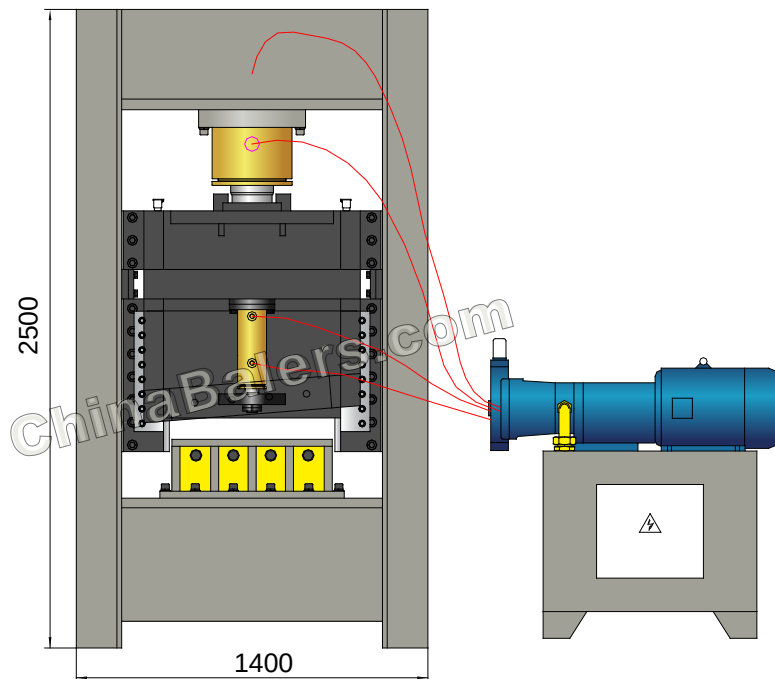

Q15A-2500 I



Hydraulic Shear (Square Shear)

Model: Q15A-2500 I

Power System (Motor)

Type:	Y200L2-6
Rated Power:	22 kW
Rated Speed:	970 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Max. Shearing Force:	250 Ton
Max. Pressing Force:	12.5 Ton
Hydraulic System Pressure:	25 MPa
Cutting Speed:	4-7 times/min

Hydraulic System (Pump)

Type:	160YCY14-1B
Rated Displacement:	160 ml/r
Max Operating Pressure:	31.5 MPa

Optional Configuration

NOK (JAPAN) Seal Packings for Cylinders;
Cooler / Heater;
Magnetic Oil Filter;
Diesel / Diesel Generator for Power.

Operation System

Hydro-electrical Valves, Push Button Control.

General Description

Main Machine Size (L×W×H):	1400×800×2500 mm
Height of Working Table:	780 mm
Blade Length:	600 mm
Blade Angle:	4.5 Degree
Shear Opening:	90 mm
Max. Cutting Size (Steel Sheet):	30×500 mm
Shipping Weight:	Approx. 5.9 tons
Loading (Standard Containers):	1/2×20'GP





Hydraulic Oil Brand

Oil Tank Volume: 1400 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

Q15A-2500 II

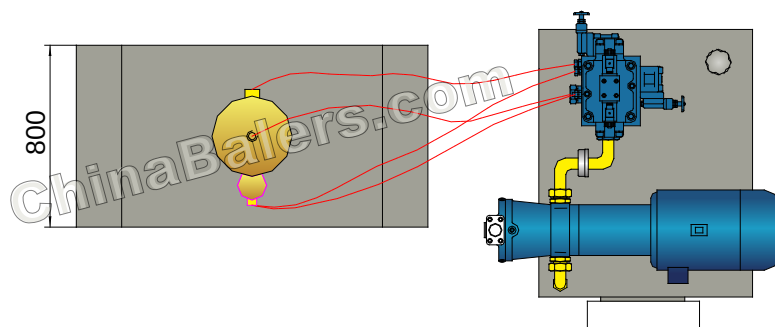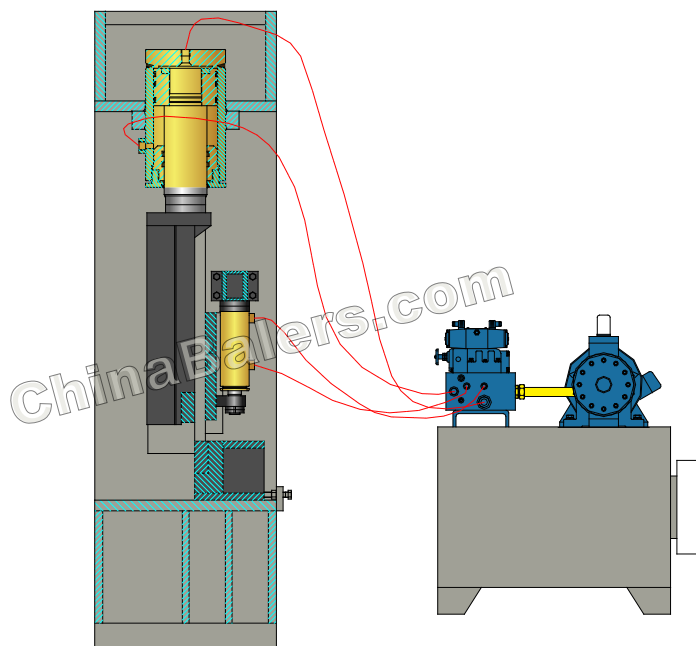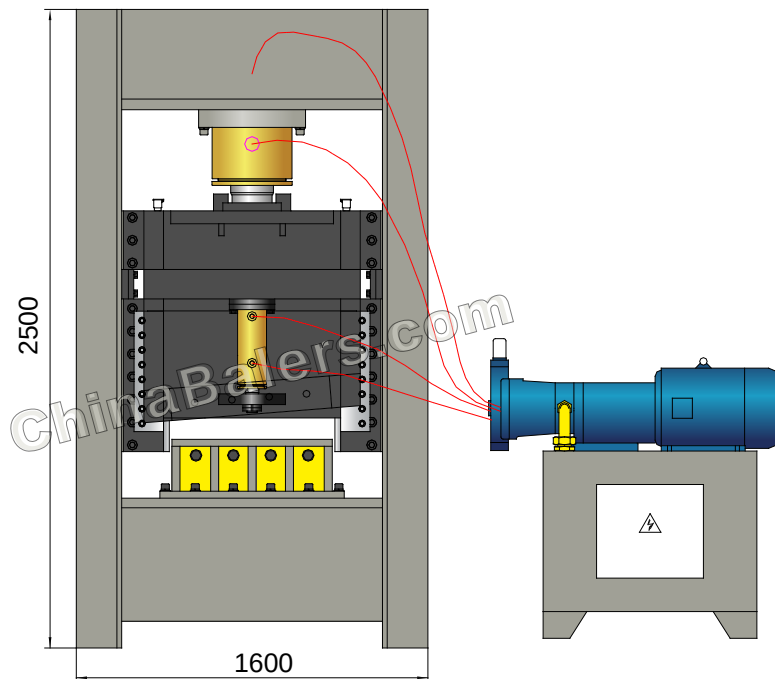

Q15A-2500 II



Hydraulic Shear (Square Shear)

Model: Q15A-2500 II

Power System (Motor, 2 sets)

Type:	Y160L-4
Rated Power:	15 kW (/set)
Rated Speed:	1460 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Max. Shearing Force:	250 Ton
Max. Pressing Force:	12.5 Ton
Hydraulic System Pressure:	25 MPa
Cutting Speed:	4-7 times/min

Hydraulic System (Pump, 2 sets)

Type:	63YCY14-1B
Rated Displacement:	63 ml/r (/set)
Max Operating Pressure:	31.5 MPa

Optional Configuration

NOK (JAPAN) Seal Packings for Cylinders;
Cooler / Heater;
Magnetic Oil Filter;
Diesel / Diesel Generator for Power.

Operation System

Hydro-electrical Valves, Push Button Control.

General Description

Main Machine Size (L×W×H):	1600×800×2500 mm
Height of Working Table:	780 mm
Blade Length:	800 mm
Blade Angle:	4.5 Degree
Shear Opening:	60 mm
Max. Cutting Size (Steel Sheet):	30×700 mm
Shipping Weight:	Approx. 6.5 tons
Loading (Standard Containers):	1/2×20'GP





Hydraulic Oil Brand

Oil Tank Volume: 1400 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

Q15A-3150

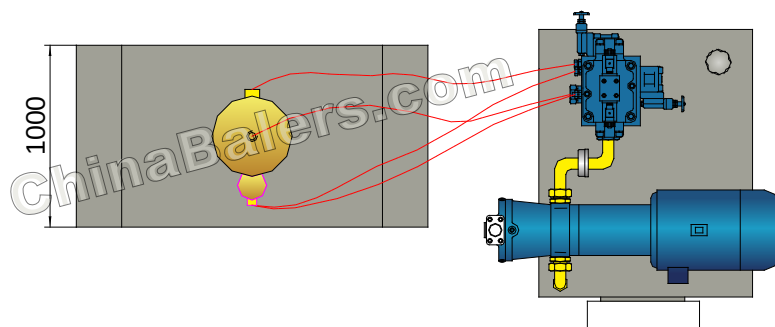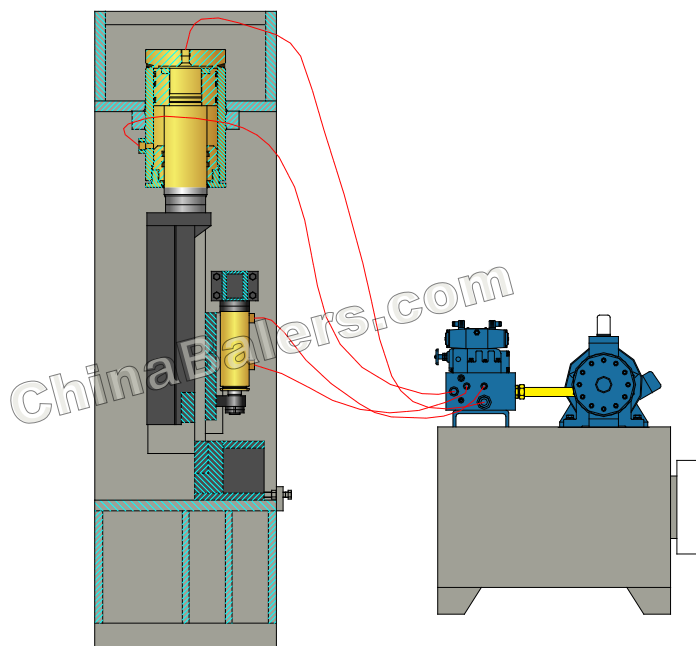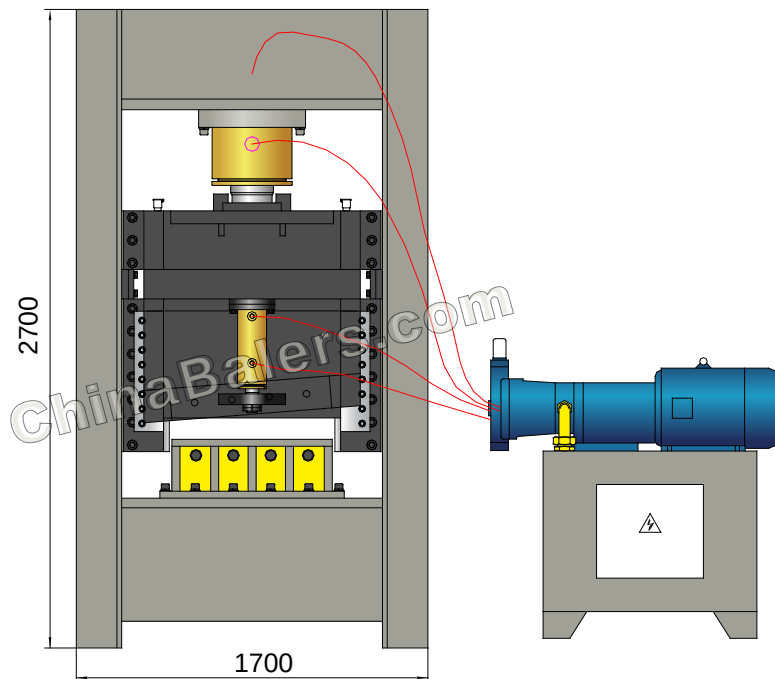

Q15A-3150



Hydraulic Shear (Square Shear)

Model: Q15A-3150

Power System (Motor)

Type:	Y280S-6
Rated Power:	45 kW
Rated Speed:	980 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Max. Shearing Force:	315 Ton
Max. Pressing Force:	23.5 Ton
Hydraulic System Pressure:	25 MPa
Cutting Speed:	4-7 times/min

Hydraulic System (Pump, 2 sets)

Pump #1:	250YCY14-1B
Rated Displacement:	250 ml/r
Max Operating Pressure:	31.5 MPa

Pump #2:	80YCY14-1B
Rated Displacement:	80 ml/r
Max Operating Pressure:	31.5 MPa

Optional Configuration

NOK (JAPAN) Seal Packings for Cylinders;
Cooler / Heater;
Magnetic Oil Filter;
Diesel / Diesel Generator for Power.

Operation System

Hydro-electrical Valves, Push Button Control.

General Description

Main Machine Size (L×W×H):	1700×1000×2700 mm
Height of Working Table:	780 mm
Blade Length:	800 mm
Blade Angle:	4.5 Degree
Shear Opening:	120 mm
Max. Cutting Size (Steel Sheet):	30×700 mm
Shipping Weight:	Approx. 7 tons
Loading (Standard Containers):	1×20'GP





Hydraulic Oil Brand

Oil Tank Volume: 2300 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

Q15A-4000

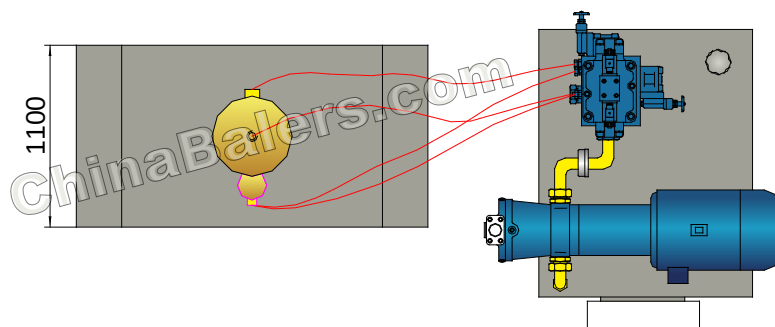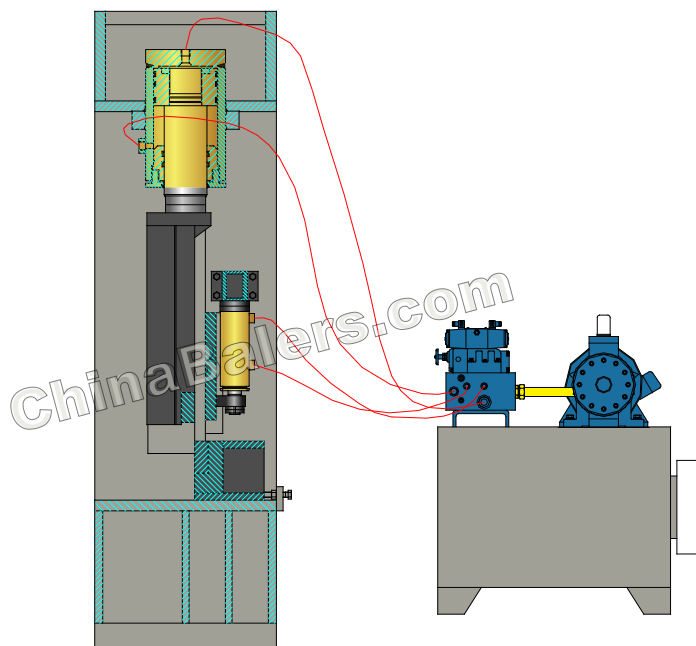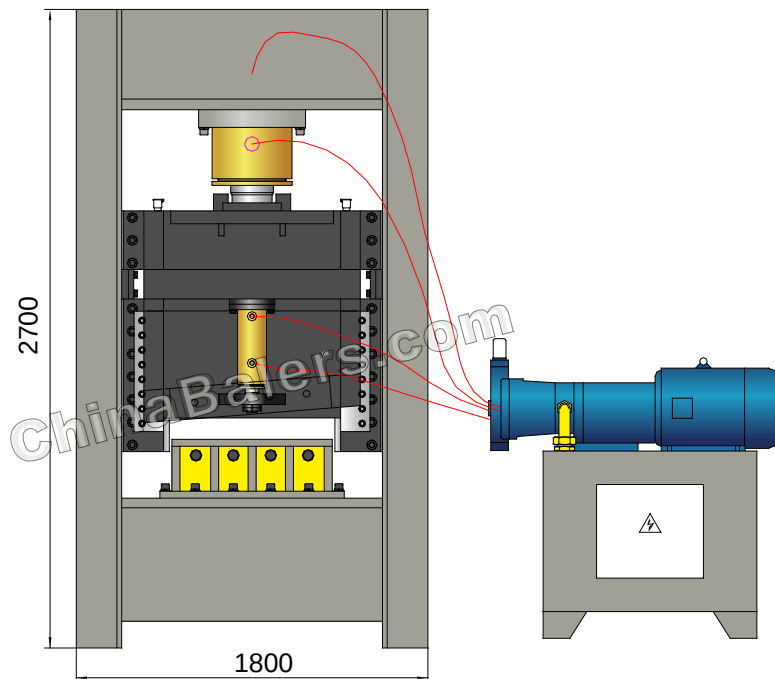

Q15A-4000



Hydraulic Shear (Square Shear)

Model: Q15A-4000

Power System (Motor, 2 sets)

Type:	Y200L2-6
Rated Power:	22 kW (/set)
Rated Speed:	970 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Max. Shearing Force:	400 Ton
Max. Pressing Force:	38 Ton
Hydraulic System Pressure:	25 MPa
Cutting Speed:	4-7 times/min

Hydraulic System (Pump, 2 sets)

Type:	160YCY14-1B
Rated Displacement:	160 ml/r (/set)
Max Operating Pressure:	31.5 MPa

Optional Configuration

NOK (JAPAN) Seal Packings for Cylinders;
Cooler / Heater;
Magnetic Oil Filter;
Diesel / Diesel Generator for Power.

Operation System

Cartridge Valves, PLC Control.

General Description

Main Machine Size (L×W×H):	1800×1100×2700 mm
Height of Working Table:	800 mm
Blade Length:	800 mm
Blade Angle:	4.5 Degree
Shear Opening:	120 mm
Max. Cutting Size (Steel Sheet):	35×700 mm
Shipping Weight:	Approx. 15.5 tons
Loading (Standard Containers):	1×20'GP





Hydraulic Oil Brand

Oil Tank Volume: 2300 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

Q15A-5000

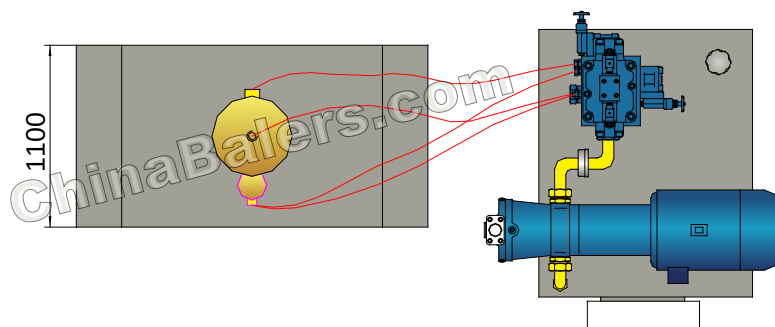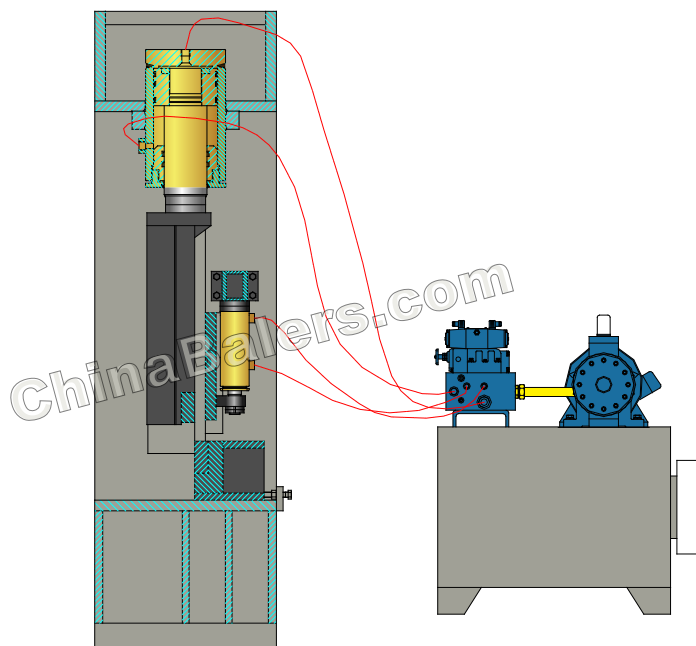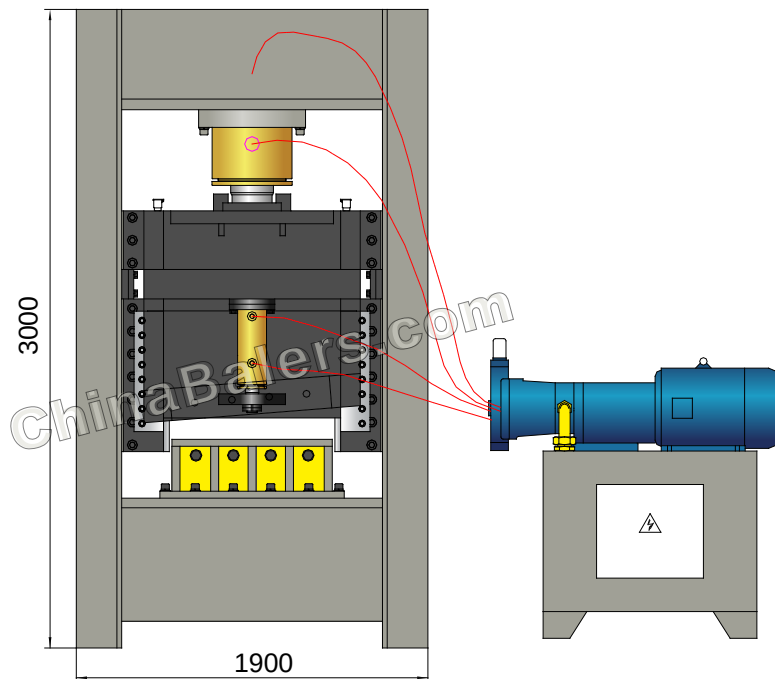

Q15A-5000



Hydraulic Shear (Square Shear)

Model: Q15A-5000

Power System (Motor, 2 sets)

Type:	Y280S-6
Rated Power:	45 kW (/set)
Rated Speed:	980 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Max. Shearing Force:	500 Ton
Max. Pressing Force:	38 Ton
Hydraulic System Pressure:	25 MPa
Cutting Speed:	4-7 times/min

Hydraulic System (Pump, 2 sets)

Type:	250YCY14-1B
Rated Displacement:	250 ml/r (/set)
Max Operating Pressure:	31.5 MPa

Optional Configuration

NOK (JAPAN) Seal Packings for Cylinders;
Cooler / Heater;
Magnetic Oil Filter;
Diesel / Diesel Generator for Power.

Operation System

Cartridge Valves, PLC Control.

General Description

Main Machine Size (L×W×H):	1900×1100×3000 mm
Height of Working Table:	815 mm
Blade Length:	900 mm
Blade Angle:	4.5 °
Shear Opening:	200 mm
Max. Cutting Size (Steel Sheet):	40×800 mm
Shipping Weight:	Approx. 18 tons
Loading (Standard Containers):	1×20'GP




Hydraulic Oil Brand

Oil Tank Volume: 2300 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

Q15B-1600

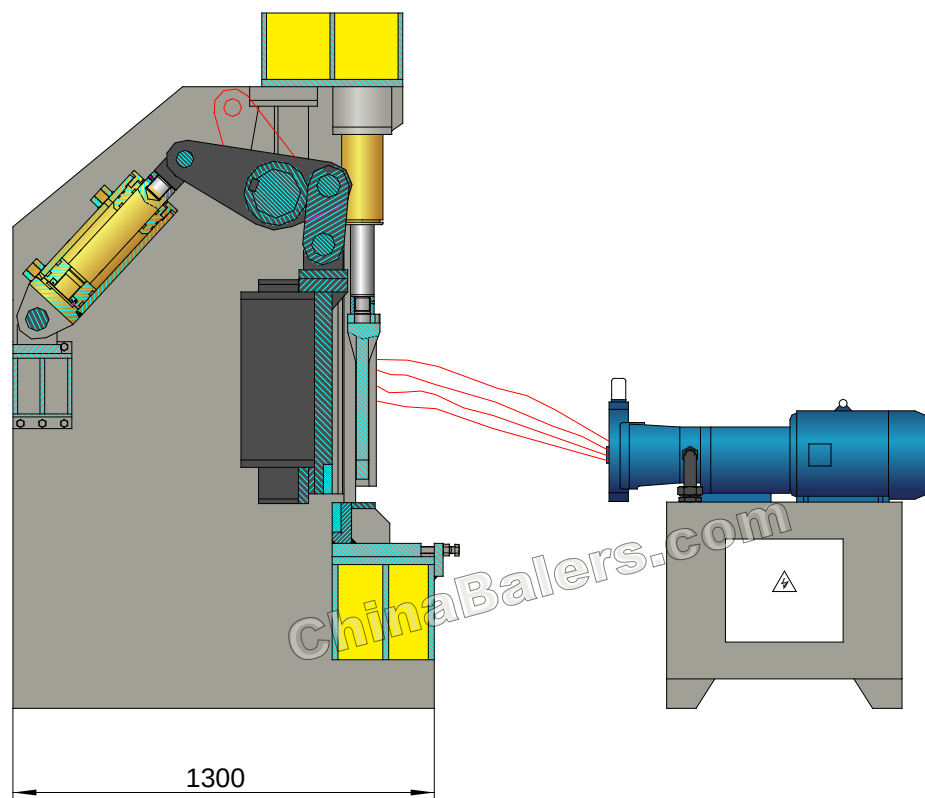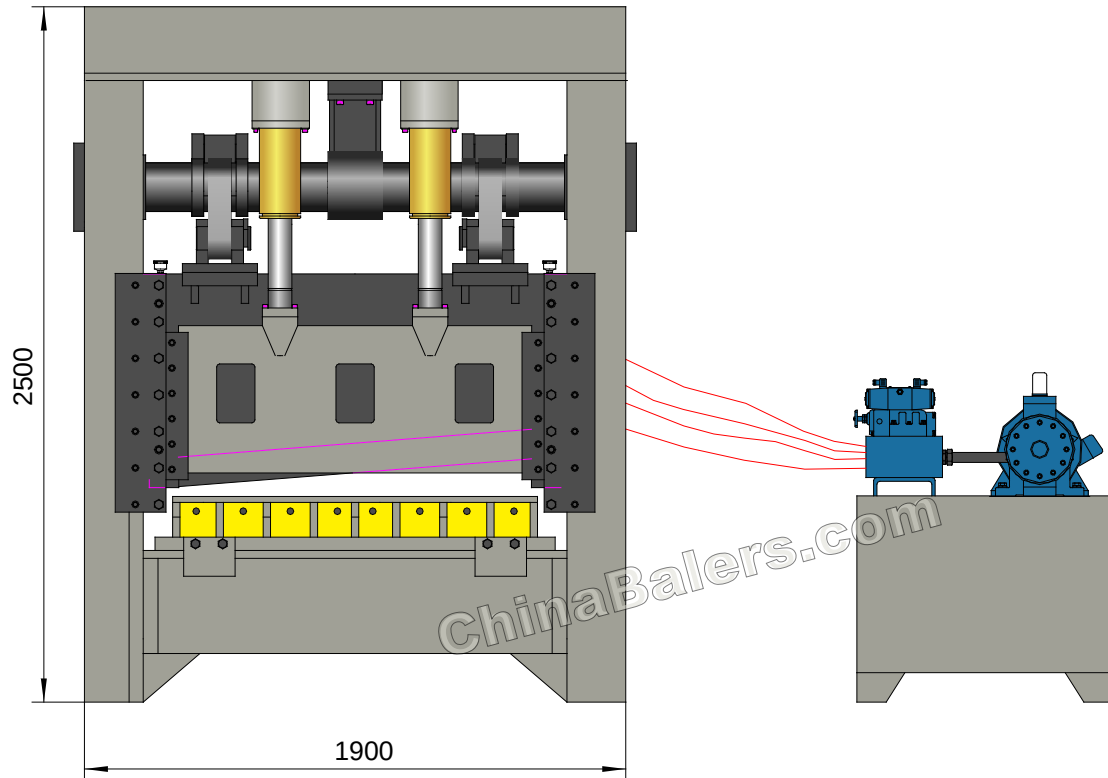

Q15B-1600



Hydraulic Shear (Square Shear)

Model: Q15B-1600

Power System (Motor)

Type:	Y180M-4
Rated Power:	18.5 kW
Rated Speed:	1470 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Max. Shearing Force:	2×80 Ton
Max. Pressing Force:	2×25 Ton
Hydraulic System Pressure:	25 MPa
Cutting Speed:	4-7 times/min

Hydraulic System (Pump)

Type:	80YCY14-1B
Rated Displacement:	80 ml/r
Max Operating Pressure:	31.5 MPa

Optional Configuration

NOK (JAPAN) Seal Packings for Cylinders;
Cooler / Heater;
Magnetic Oil Filter;
Diesel / Diesel Generator for Power.

Operation System

Hydro-electrical Valves, Push Button Control.

General Description

Main Machine Size (L×W×H):	1900×1300×2500 mm
Height of Working Table:	700 mm
Blade Length:	1200 mm
Blade Angle:	4.5 Degree
Shear Opening:	30 mm
Max. Cutting Size (Steel / Nickel Sheet):	16 / 12×1000 mm
Shipping Weight:	Approx. 7 tons
Loading (Standard Containers):	1×20'GP




Hydraulic Oil Brand

Oil Tank Volume: 600 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

Q15B-2000

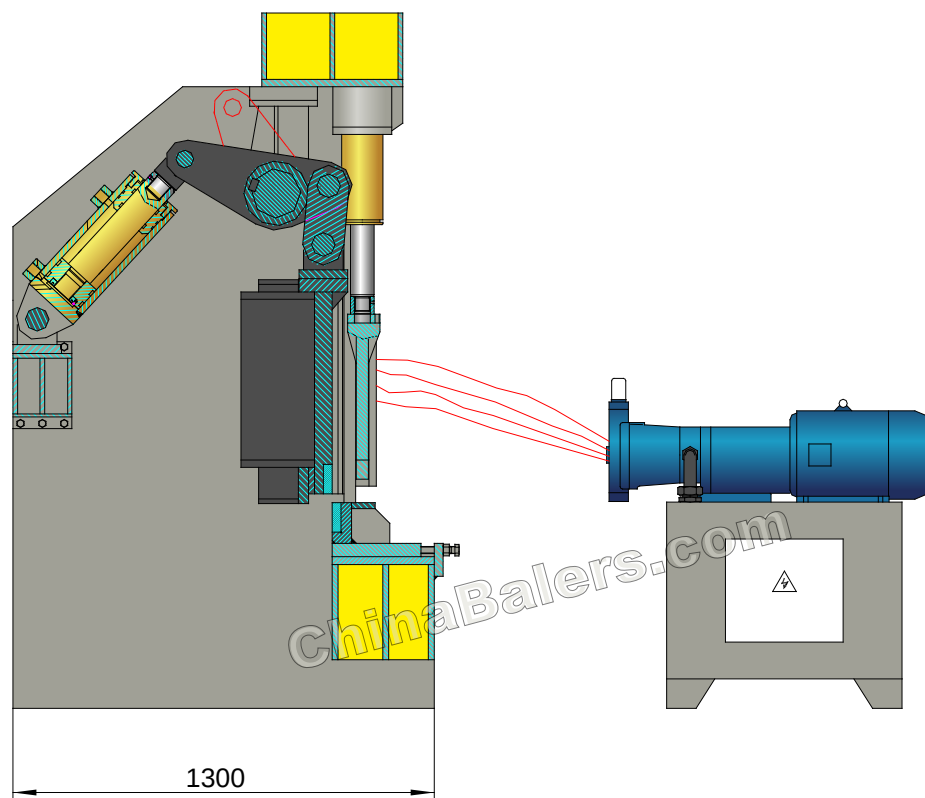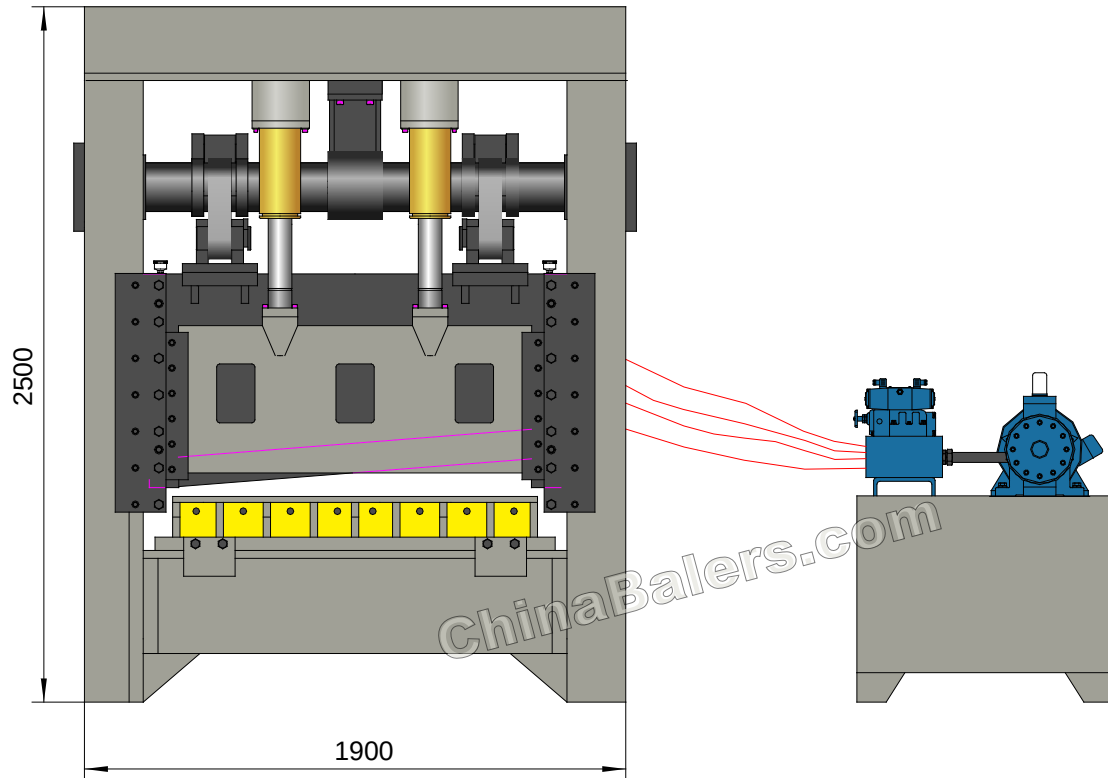

Q15B-2000



Hydraulic Shear (Square Shear)

Model: Q15B-2000

Power System (Motor)

Type:	Y200L2-6
Rated Power:	22 kW
Rated Speed:	970 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Max. Shearing Force:	2×100 Ton
Max. Pressing Force:	2×25 Ton
Hydraulic System Pressure:	25 MPa
Cutting Speed:	4-7 times/min

Hydraulic System (Pump)

Type:	160YCY14-1B
Rated Displacement:	160 ml/r
Max Operating Pressure:	31.5 MPa

Optional Configuration

NOK (JAPAN) Seal Packings for Cylinders;
Cooler / Heater;
Magnetic Oil Filter;
Diesel / Diesel Generator for Power.

Operation System

Hydro-electrical Valves, Push Button Control.

General Description

Main Machine Size (L×W×H):	1900×1300×2500 mm
Height of Working Table:	700 mm
Blade Length:	1200 mm
Blade Angle:	4.5 Degree
Shear Opening:	30 mm
Max. Cutting Size (Steel / Nickel Sheet):	18 / 16×1000 mm
Shipping Weight:	Approx. 7.5 tons
Loading (Standard Containers):	1×20'GP




Hydraulic Oil Brand

Oil Tank Volume: 1400 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

Q15B-2500 I

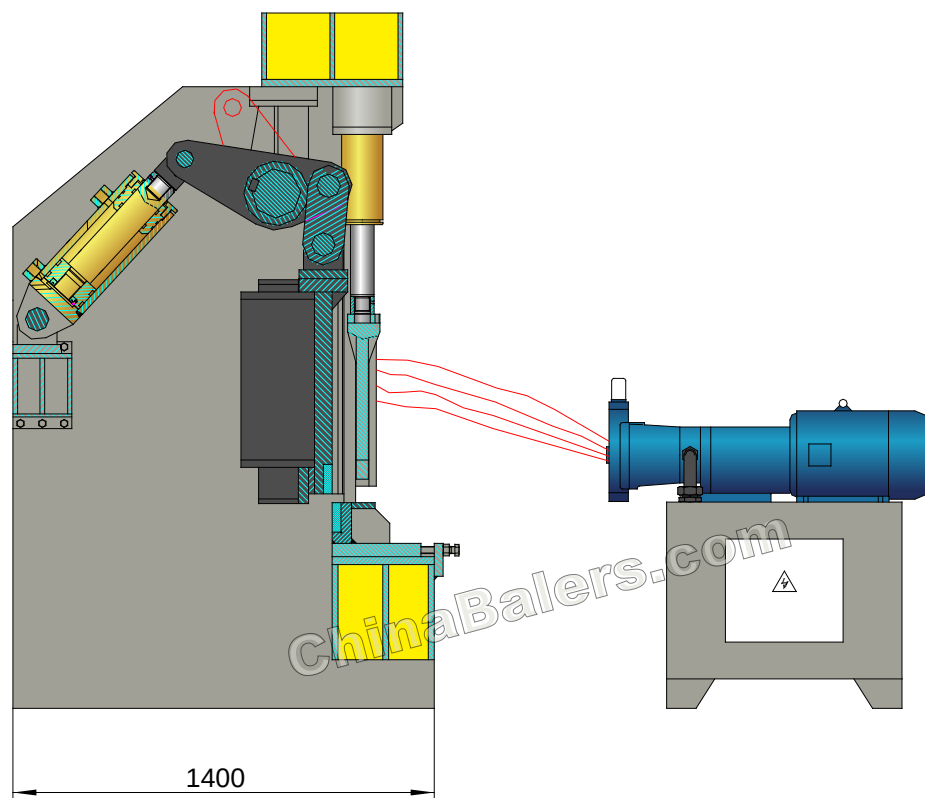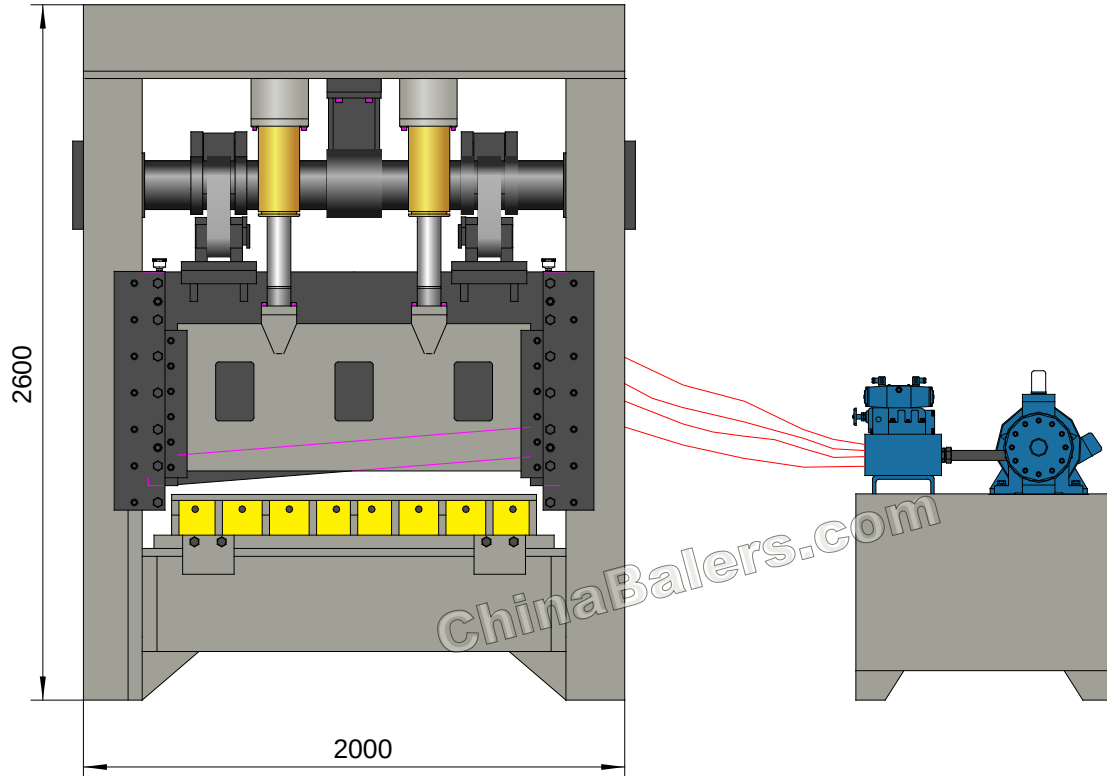

Q15B-2500 I



Hydraulic Shear (Square Shear)

Model: Q15B-2500 I

Power System (Motor, 2 sets)

Type:	Y180M-4
Rated Power:	18.5 kW (/set)
Rated Speed:	1470 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Max. Shearing Force:	2×125 Ton
Max. Pressing Force:	2×25 Ton
Hydraulic System Pressure:	25 MPa
Cutting Speed:	4-7 times/min

Hydraulic System (Pump, 2 sets)

Type:	80YCY14-1B
Rated Displacement:	80 ml/r (/set)
Max Operating Pressure:	31.5 MPa

Optional Configuration

NOK (JAPAN) Seal Packings for Cylinders;
Cooler / Heater;
Magnetic Oil Filter;
Diesel / Diesel Generator for Power.

Operation System

Hydro-electrical Valves, Push Button Control.

General Description

Main Machine Size (L×W×H):	2000×1400×2600 mm
Height of Working Table:	685 mm
Blade Length:	1200 mm
Blade Angle:	4.5 Degree
Shear Opening:	40 mm
Max. Cutting Size (Steel / Nickel Sheet):	25 / 20×1000 mm
Shipping Weight:	Approx. 8.5 tons
Loading (Standard Containers):	1×20'GP




Hydraulic Oil Brand

Oil Tank Volume: 1400 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

Q15B-2500 II

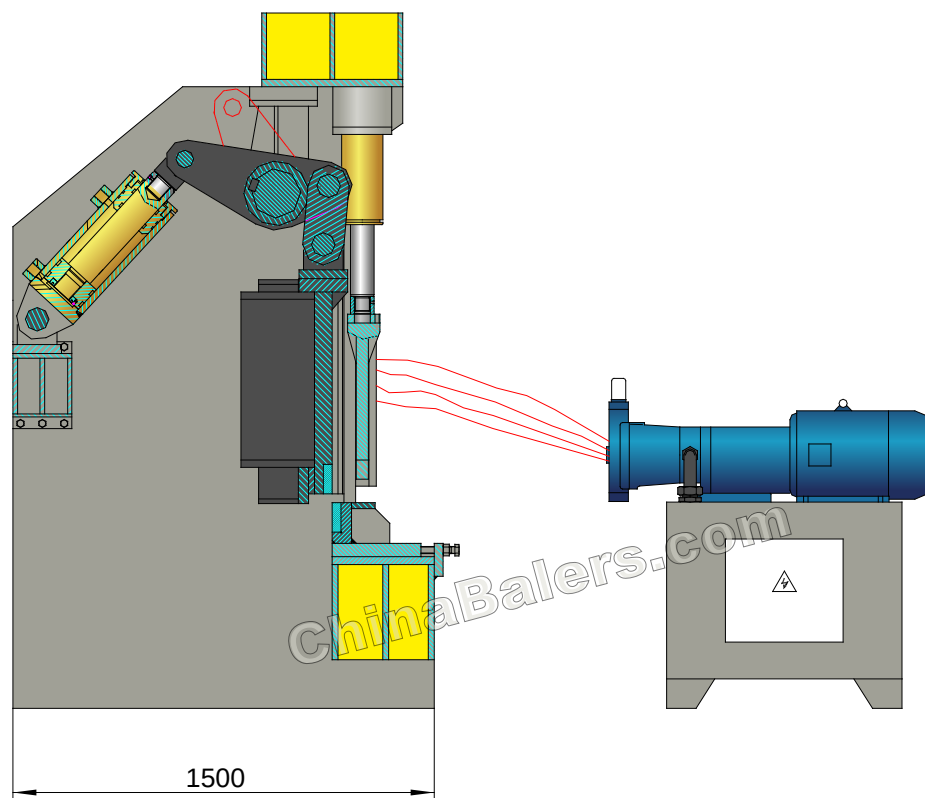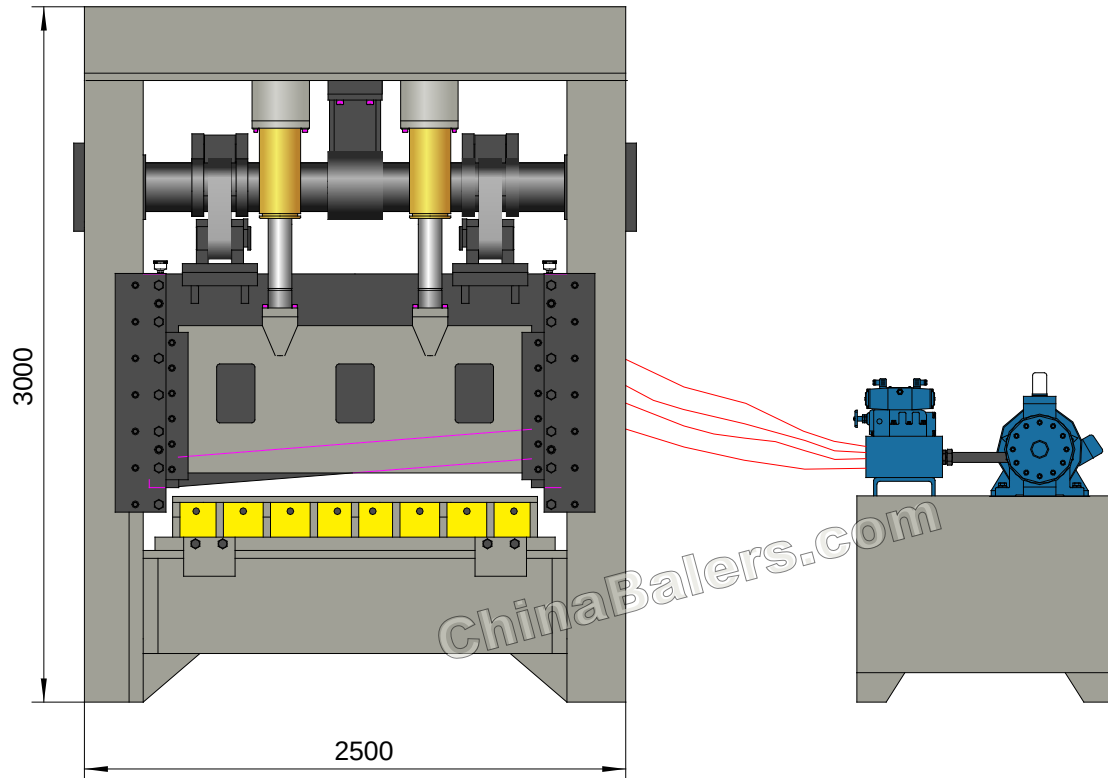

Q15B-2500 II



Hydraulic Shear (Square Shear)

Model: Q15B-2500 II

Power System (Motor, 2 sets)

Type:	Y180M-4
Rated Power:	18.5 kW (/set)
Rated Speed:	1470 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Max. Shearing Force:	2×125 Ton
Max. Pressing Force:	2×25 Ton
Hydraulic System Pressure:	25 MPa
Cutting Speed:	4-7 times/min

Hydraulic System (Pump, 2 sets)

Type:	80YCY14-1B
Rated Displacement:	80 ml/r (/set)
Max Operating Pressure:	31.5 MPa

Optional Configuration

NOK (JAPAN) Seal Packings for Cylinders;
Cooler / Heater;
Magnetic Oil Filter;
Diesel / Diesel Generator for Power.

Operation System

Hydro-electrical Valves, Push Button Control.

General Description

Main Machine Size (L×W×H):	2500×1500×3000 mm
Height of Working Table:	780 mm
Blade Length:	1600 mm
Blade Angle:	4 Degree
Shear Opening:	40 mm
Max. Cutting Size (Steel / Nickel Sheet):	25 / 20×1400 mm
Shipping Weight:	Approx. 10 tons
Loading (Standard Containers):	




Hydraulic Oil Brand

Oil Tank Volume: 1400 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

Q15B-3150

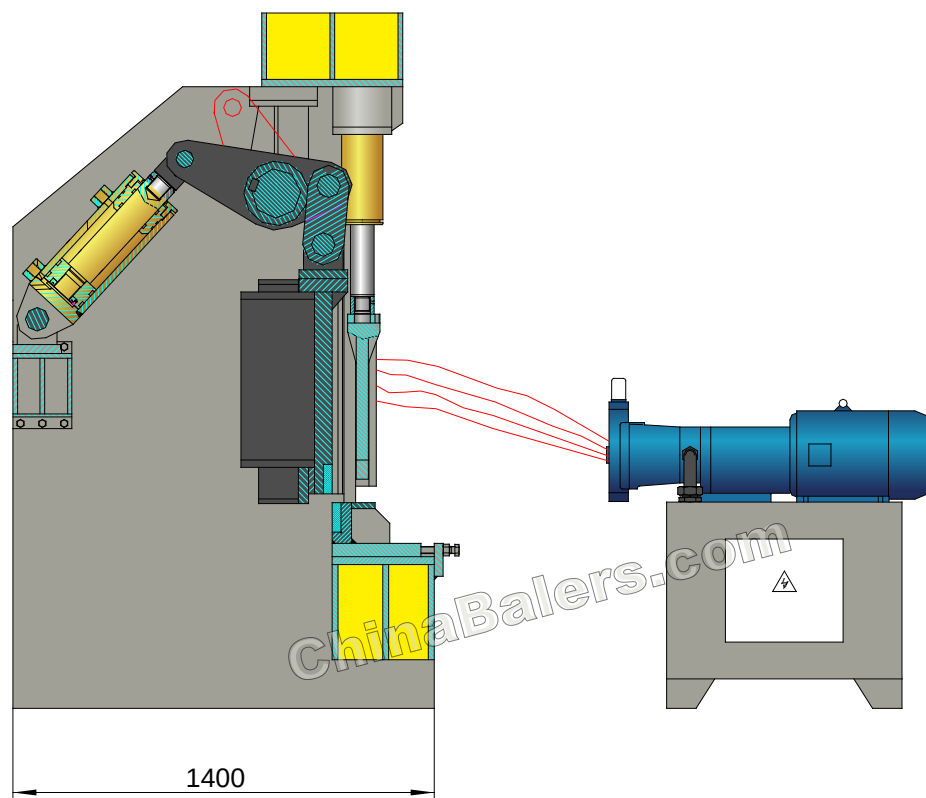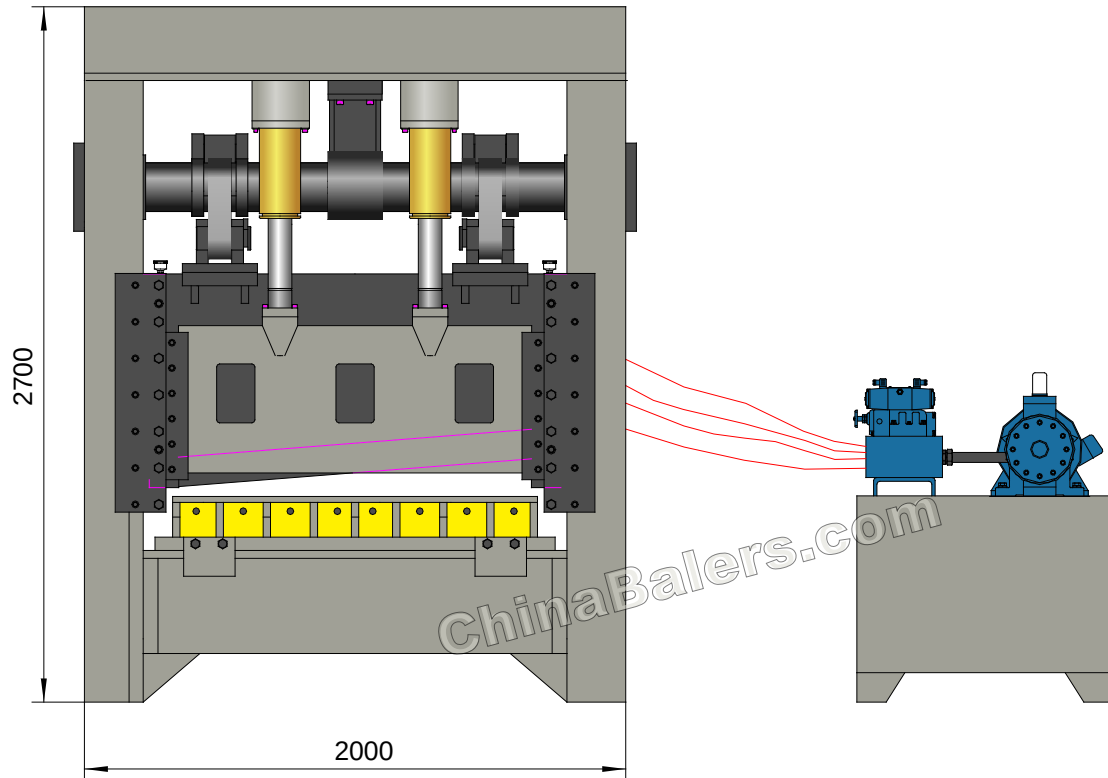

Q15B-3150



Hydraulic Shear (Square Shear)

Model: Q15B-3150

Power System (Motor, 2 sets)

Type:	Y180M-4
Rated Power:	18.5 kW (/set)
Rated Speed:	1470 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Max. Shearing Force:	2×160 Ton
Max. Pressing Force:	2×25 Ton
Hydraulic System Pressure:	25 MPa
Cutting Speed:	4-7 times/min

Hydraulic System (Pump, 2 sets)

Type:	80YCY14-1B
Rated Displacement:	80 ml/r (/set)
Max Operating Pressure:	31.5 MPa

Optional Configuration

NOK (JAPAN) Seal Packings for Cylinders;
Cooler / Heater;
Magnetic Oil Filter;
Diesel / Diesel Generator for Power.

Operation System

Hydro-electrical Valves, Push Button Control.

General Description

Main Machine Size (L×W×H):	2000×1400×2700 mm
Height of Working Table:	685 mm
Blade Length:	1200 mm
Blade Angle:	4.5 Degree
Shear Opening:	40 mm
Max. Cutting Size (Steel / Nickel Sheet):	30 / 25×1000 mm
Shipping Weight:	Approx. 8.8 tons
Loading (Standard Containers):	1×20'GP

Hydraulic Oil Brand

Oil Tank Volume: 1400 ltr

ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

Soochow Baling Machinery Ltd.
Jiangsu Huahong Technology Stock Co., Ltd.

Factory: Zhouzhuang, Jiangyin, Jiangsu

Office: Rm 1202, SIPCTD Bldg, No. 381 Suzhou Avenue East,
Suzhou Industrial Park, Suzhou, Jiangsu 215028 China

Tel: +86 512 6255 1141 **Fax:** +86 512 6255 1142

Email: info@chinabalers.com; chinabalers@foxmail.com

Website: www.chinabalers.com; www.chinabalers.net